


NSH - Launch and Recovery System


For handling of larger water crafts

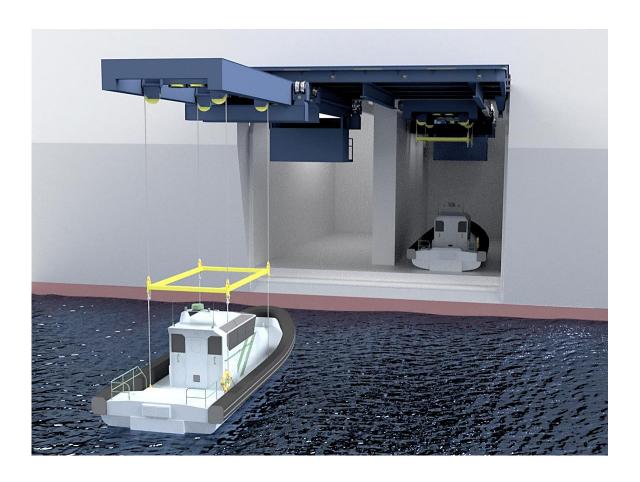

Developed for safe operations in the most demanding environment under critical conditions

Overhead Cranes

High working capacity

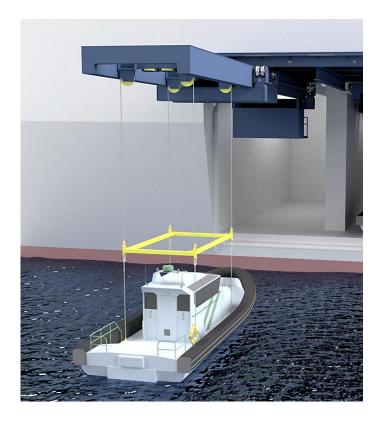

General data

Two (2) parallel operated overhead cranes


SWL: 25ton per crane

Outreach: 14.5m

Electric / Hydraulically operated

The significant outreach is achieved by using the top hinged door as an extension.

Stern/Side Door Top hinged

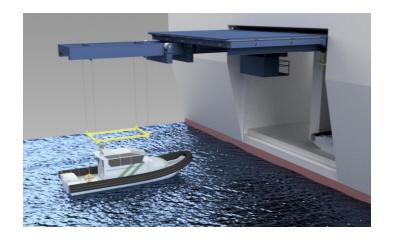

General data

Top hinged door

Watertight

Electric / Hydraulically operated

NSH SHIPS EQUIPMENT AS Laksevågneset 12, 5160 Bergen, Norway

Email: contact@northseahandling.no

Phone: +47 91 60 86 00 www.northseahandling.no

